FACTORY ORDER NO. 933381-01

NOTE 1. DIMENSIONS IN INCHES AND [mm].

REV	REVISION NOTE	MADE	DATE

UNIT #2

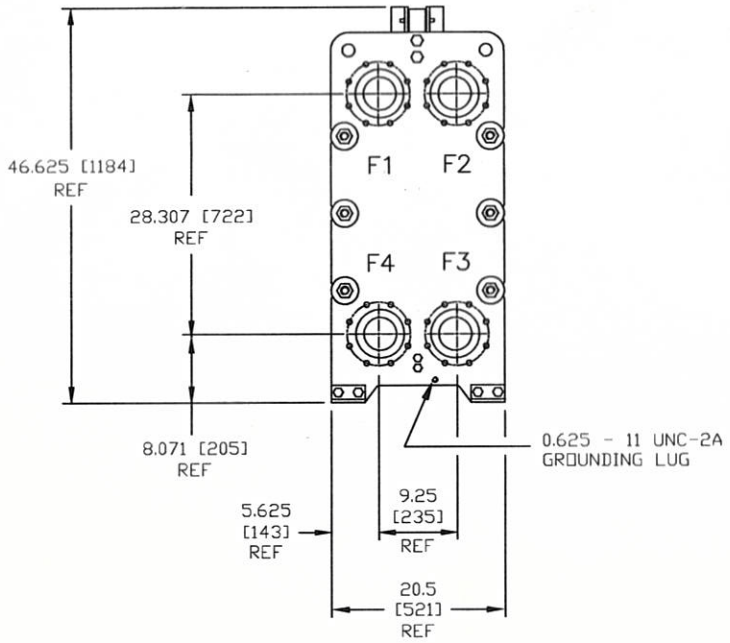

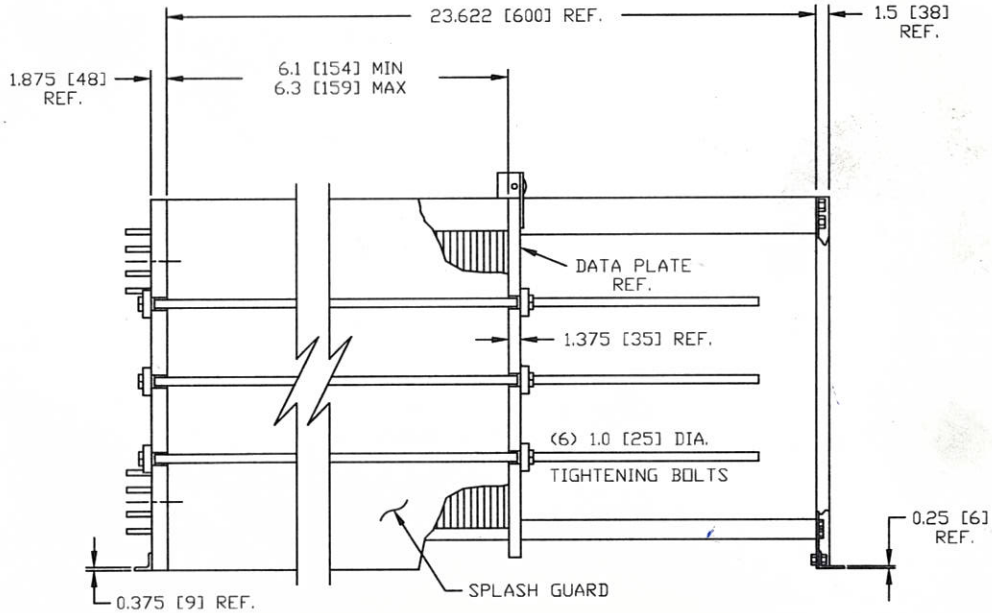

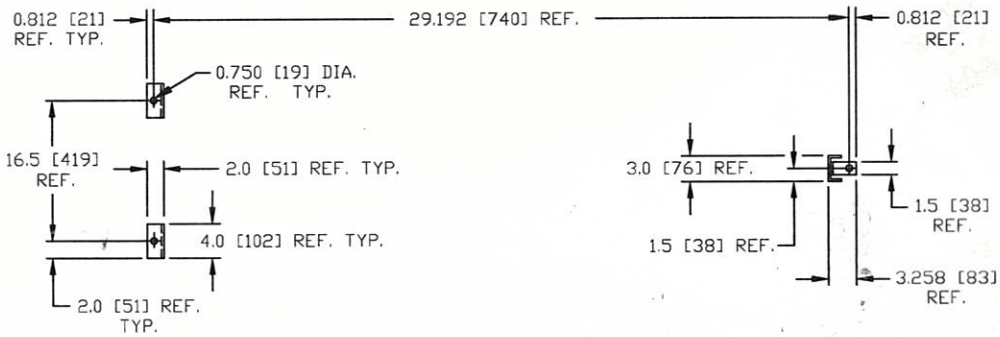

UNIT CONSTRUCTION – ASME		DESIGN CONDITIONS	SIDE 1	SIDE 2
THERMAL PLATES	0.5mm / TI	DESIGN PRESS. (PSI)	150	150
GASKET TYPE	NBR – LOCK	TEST PRESS. (PSI)	195	195
PLATE MIXTURE	TMTL-54	DESIGN TEMP. (°F)	302	302
MIX (SIDE 1)	1 X 26	MIN. TEMP. (°F)	32	32
MIX (SIDE 2)	1 X 26			
PLATE QTY.	53 / 70 MAX			
CARRY BAR	600mm / ALUM			
TIGHTENING BOLTS	STL (ZINC PLATED)			
SPLASH GUARD	ALUMINUM			
WEIGHT DRY/FULL	999 / 1065 (LBS)			

CONNECTIONS		
PORT	LOCATION	TYPE AND DESCRIPTION
SIDE 1 (IN)	F1	TI LINER, FOR 4" – 150# ANSI FLANGE
SIDE 1 (OUT)	F4	TI LINER, FOR 4" – 150# ANSI FLANGE
SIDE 2 (IN)	F3	316SS LINER, FOR 4" – 150# ANSI FLANGE
SIDE 2 (OUT)	F2	316SS LINER, FOR 4" – 150# ANSI FLANGE

This document contains material and/or information which is the property of ITT Industries Inc., and supplied only on a confidential basis. No transmittal or disclosure shall be made to any person, firm, or corporation without prior written approval of ITT Industries Inc., or its ITT Heat Transfer Technology unit.

DRAWN GB DATE 051204
CHECK DATE
PLOT SCALE 0.0940

ITT Standard
Buffalo, NY U.S.A.

TITLE MODEL P21

SIZE	PART NUMBER	REV
C	5-459-23-053-003	